A black and white photograph of a modern office interior. The room features glass walls and a ceiling with recessed lighting. In the foreground, a desk is set up with two computer monitors and two office chairs. The desk is supported by a metal frame with a clamping rail. The background shows a large window with a view of a cityscape.

ONLEVEL

STARTRACK

CLAMPING RAIL FOR ALL-GLASS INSTALLATIONS
AND PARTITION WALLS

STARTRACK

Clamping Rail for All-Glass Installations and Partition Walls

Outer Space – Endless Widths


We're in the year 2020. These are the adventures of ONLEVEL travelling with its crew to realise new ideas – new products and new systems. Many light years away from the conservative mindset, ONLEVEL reaches galaxies which man has never seen before. There is no easier and faster installation – with this unrivalled safety.

Why is **STARTRACK** not only unique but also the fastest and the most beautiful?

- One: The first completely pre-assembled partition wall system for glass. This greatly reduces the installation effort!
- Two: Integrated glass fixing for glass thicknesses from 8 - 10,76 mm. A pre-assembled rubber seal for all glass thicknesses!
- Three: Integrated seals instead of applying silicone – no more troublesome insertion of rubber seals!
- Four: Fabulous looks – minimalistic, almost invisible glass support rubbers.

Essential Features


- | Top, ceiling and wall mounting
- | Floor-to-ceiling glazings
- | Completely pre-assembled partition wall system for glass
- | Almost invisible glass support rubbers
- | Glass height up to 3000 mm
- | Relation of glass height to width 3:1
- | Do not use outdoors
- | No fall protection
- | Installation with EGS glass 8/10mm and VSG glass 8.76 and 10.76 mm possible

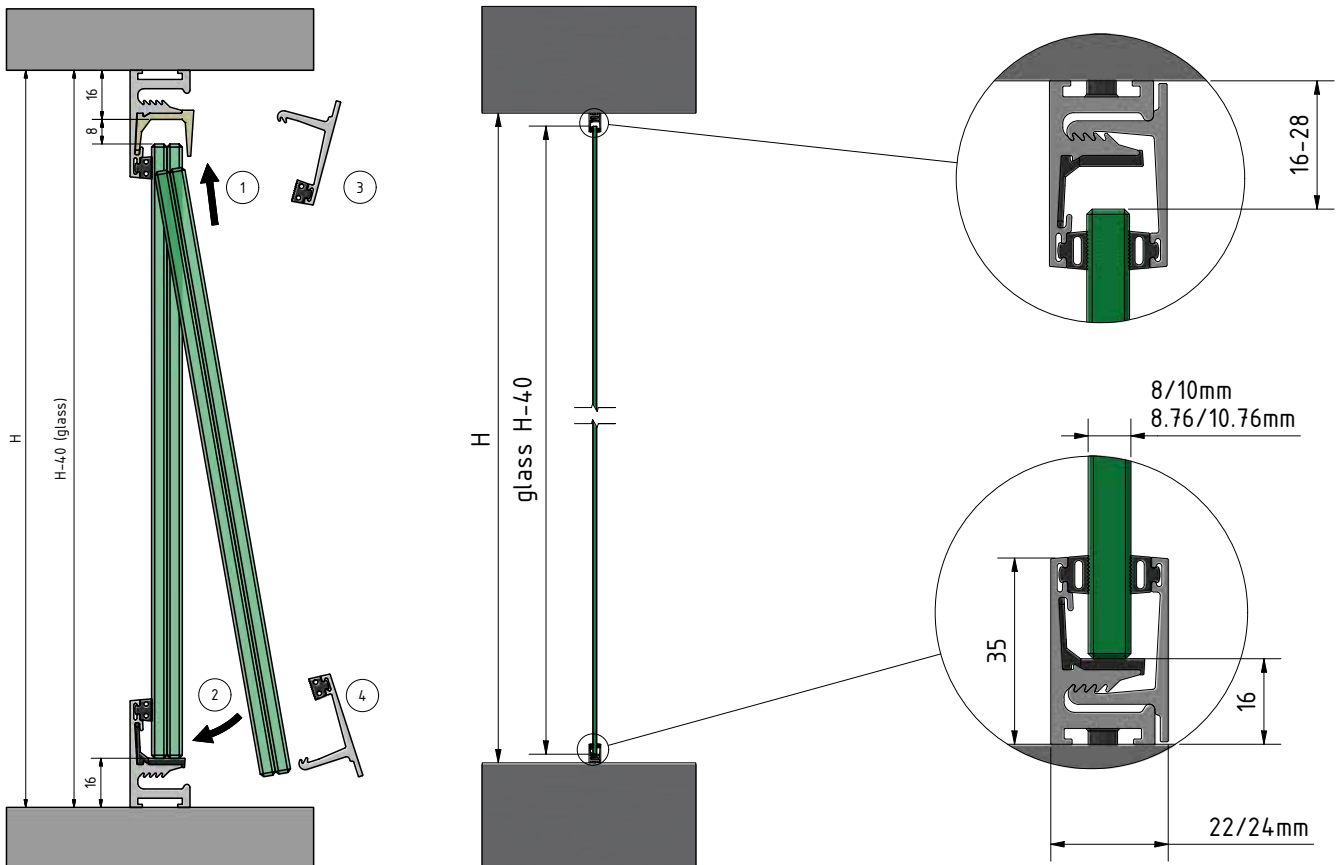

STARTRACK







Integrated glass support
rubbers for 8 - 10 ,76mm glass

The glass thickness
is adjustable

Cover profile can simply be
inserted


Almost invisible
glass support rubbers

STARTRACK | TOP, CEILING AND WALL MOUNTING

Startrack Glass Profile



- | Including pre-assembled glass rubber profiles and glass fixing parts
- | Glass thickness 8/10, 8,76/10,76 mm
- | Sales unit: 1 piece

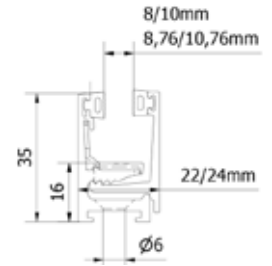


Model 0100	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
2500	20.0100.002.10	20.0100.002.11	20.0100.002.13/16/18
5000	20.0100.005.10	20.0100.005.11	20.0100.005.13/16/18

Startrack End Cap



- | Sales unit: 8 pieces




Model 9001	Plastic grey	Plastic black
Glass thickness	Art. no.	Art. no.
8/8.76 mm	20.9001.008.47	20.9001.008.41
10/10.76 mm	20.9001.010.47	20.9001.010.41

Startrack Spare Glass Rubbers



- | Supplementary article in case of loss or damage of the pre-assembled glass rubber seal
- | Glass thickness 8/10, 8,76/10,76 mm
- | Length: 25 m
- | Sales unit: 1 piece

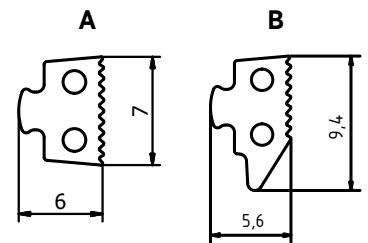


Modell 9100	for cover Profile (A)	for basic Profile (B)
	Art. no.	Art. no.
	20.9100.250.60	20.9200.250.60

Startrack Mounting Screw



- | Ø 4.5 x 60 mm
- | Required number per 2500 mm: 13 / pro 5000 mm: 25
- | Sales unit: 50 pieces

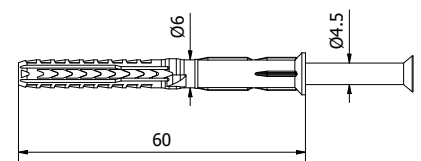

Model 9010	zinc-plated steel (inside)
	Art. no.
	20.9010.660.81

ACCESSORIES

Startrack Glass fixation

| Sales unit: 50 pieces



Model 9004		Plastic black
Glass thickness	Art. no.	
8/8,76 mm	20.9004.008.41	
10/10,76 mm	20.9004.010.41	

Tape 69



| Particularly suitable for applications where a transparent, flexible bond is required.
| Length: 12 m, Thickness: 3 mm
| Sales unit: 1 piece



Model 7025		
Width	Glass thickness	Art. no.
5 mm	8 - 8.76 mm	90.7025.008.03
7 mm	10 - 10.76 mm	90.7025.010.03
9 mm	12 - 12.76 mm	90.7025.012.03
13 mm	16.76 - 17.52 mm	90.7025.016.03
17 mm	20.76 - 21.52 mm	90.7025.020.03

Tape 69 mounting tool



| Sales unit: 1 piece

Model 0100	
For glass thicknesses	Art. no.
8/8.76 and 10/10.76 mm	90.0100.170.08
12/12.76 and 16.76/17.52 mm	90.0100.170.12
16.76/17.52 and 20.76/21.52 mm	90.0100.170.16



ONLEVEL

OnLevel Ltd | Units 6 & 7, Alexandria Court | Alexandria Drive, Ashton Commerce Park | Ashton-under-Lyne
Lancashire OL7 0QN | United Kingdom | T +44 0161 804 9500 | F +44 0161 804 9505
sales@onlevel-uk.com | www.onlevel.com