



ONLEVEL



KRONOS KLÄMFÄSTET



KRONOS

Klämfästet som klarar allt

Inspirerande Innovationer.

Kronos von ONLEVEL är det första justerbara klämfästet. Såväl effektivitet som pris var vårt fokus när vi utvecklade KRONOS. Kreativitet och innovation fungerar bara hand i hand med entusiasm – på alla plan: estetisk design, effektiva produkter och enkel installation.

Justerbart till alla relevanta glastjocklekar:

Steg	Glastjocklek
1	8 mm
2	4/4/2 (8,76 mm)
3	10 mm
4	5/5/2 (10,76 mm)
5	12 mm
6	6/6/2 (12,76 mm)

Grundläggande egenskaper

- | Alla relevanta glastjocklekar; 8 mm härdat glas upp till 12,76 mm laminerat säkerhetsglas - direkt justerbart
- | Alla relevanta stolpanslutningar - platt, Ø 42 mm och Ø 48 mm (rund)
- | Avsevärt reducerad lagerhållning
- | Avsevärt reducerat behov av teknisk support
- | Överträffad kvalitet- fästets grepp varken utvidgas eller lossnar – garanterat
- | Dolda skruvar – tack vare täckprofilen som ger en stilren look från båda sidor
- | Enkel installation – inga tidskrävande delkomponenter
- | En finish som helt matchar stolpen eller hela projektet, oavsett färgval
- | Tillverkad i Tyskland - tidlös precision och kvalitet




STATISCHE
BERECHNUNG
gemäß DIN18008



MADE IN
GERMANY



VERROTEC
Produkte RPF 16

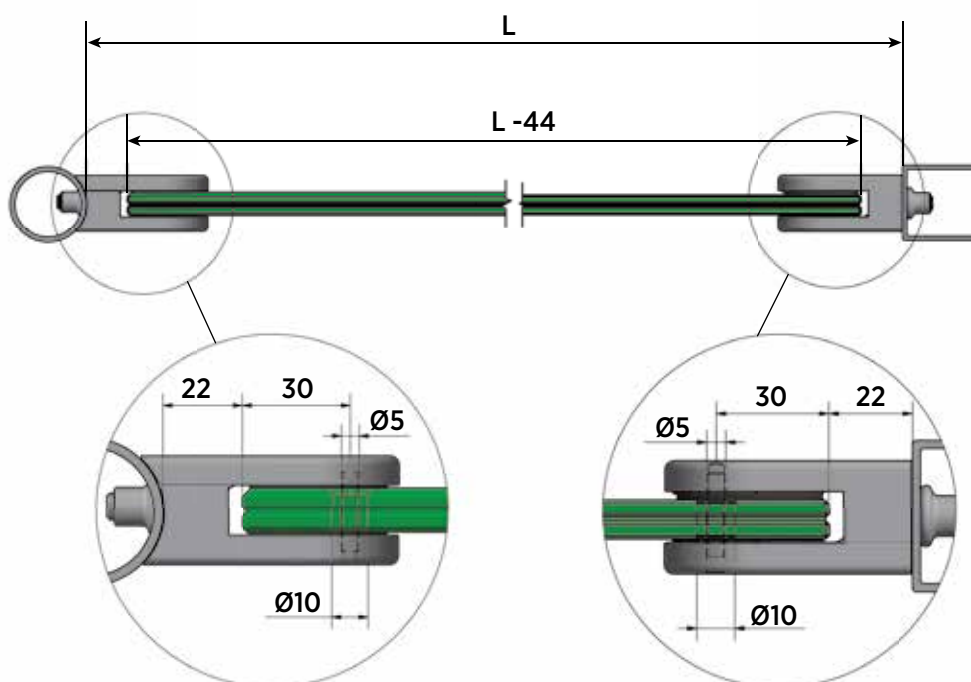

Ett klämfäste i ett stycke -
ingen montering av delkomponenter



Dolda skruvar - sätt enkelt på
önskad täckkåpa

Ett klämfäste för alla glastjocklekar
- 8 mm härdat glas till 12,76 mm
laminerat säkerhetsglas


ENGINEERED IN
GERMANY

MADE IN
GERMANY

Kronos rostfritt stål V4A



| Längd 65 mm
| Höjd 45 mm
| Förpackning: 4 styck

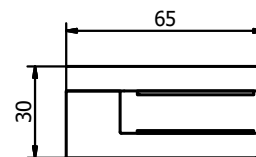


Anslutning	platt	Ø 42,4 mm	Ø 48,3 mm
	Art.nr.	Art.nr.	Art.nr.
	12.5500.000.31	12.5500.420.31	12.5500.480.31

Kronos pulverlackerat i RAL-färg efter önskemål



| Längd 65 mm
| Höjd 45 mm
| Förpackning: 4 styck

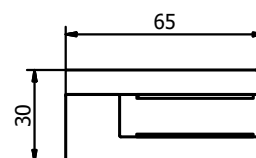

Anslutning	platt	Ø 42,4 mm	Ø 48,3 mm
RAL	Art.nr.	Art.nr.	Art.nr.
blank	12.5500.000.33	12.5500.420.33	12.5500.480.33
matt struktur	12.5500.000.36	12.5500.420.36	12.5500.480.36
matt	12.5500.000.38	12.5500.420.38	12.5500.480.38

Kronos rostfritt stål V4A



| Längd 65 mm
| Höjd 45 mm
| Förpackning: 4 styck

Anslutning	platt	Ø 42,4 mm	Ø 48,3 mm
	Art.nr.	Art.nr.	Art.nr.
	12.5510.000.31	12.5510.420.31	12.5510.480.31

Kronos pulverlackerat i RAL-färg efter önskemål



| Längd 65 mm
| Höjd 45 mm
| Förpackning: 4 styck

Anslutning	platt	Ø 42,4 mm	Ø 48,3 mm
RAL	Art.nr.	Art.nr.	Art.nr.
blank	12.5510.000.33	12.5510.420.33	12.5510.480.33
matt struktur	12.5510.000.36	12.5510.420.36	12.5510.480.36
matt	12.5510.000.38	12.5510.420.38	12.5510.480.38

Kronos glasstöd sidoställt



Ska du montera Kronos på egen hand!?!
Dessa glasstöd erbjuder 100% glidskydd utan borrhål i glaset.
Stöden håller perfekt på plats.

- | vänster och höger
- | Förpackning: 4 styck



Modell	
Art.nr.	
	90.7055.010.41

Kronos glasstöd för golvklämfästen



Vill du använda Kronos som golvklämfäste?!
Inga problem - med glasstödet ändras enkelt klämfästets funktion.

- | Förpackning: 4 styck




Modell	
Art.nr.	
	90.7055.020.41

Kronos låsstift



Låsstift måste användas vid förmontering i vägg.
Dessa säkerställer att glaset inte glider.

- | Förpackning: 4 styck




Modell	
Art.nr.	
	92.5000.029.30

Kronos justerbar skruv M8 x 20 mm



Har du inte borrarat rakt in i stolpen? Inga problem.
Våra justerbara skruvar kan jämna ut mindre ojämnheter.

- | Rostfritt stål V4A (kan även användas utomhus)
- | Förpackning: 12 styck



Modell 1050	Rostfritt stål V4A (utomhus)
Art.nr.	
	91.1050.820.30

Kronos monteringsverktyg



| Förpackning: 1 styck

Modell	
	Art.nr.
	90.0100.150.00

Kronos inställningsverktyg




| Förpackning: 1 styck

Modell	
	Art.nr.
	90.0100.155.00

Installationssituation A - utan säkerhetsstift

Installationssituation A beskriver hur klämfästet används utan säkerhetsstift. Glasningen utförs med hjälp av klämfästen och stolpar som är monterade ovanpå bottenplattan.

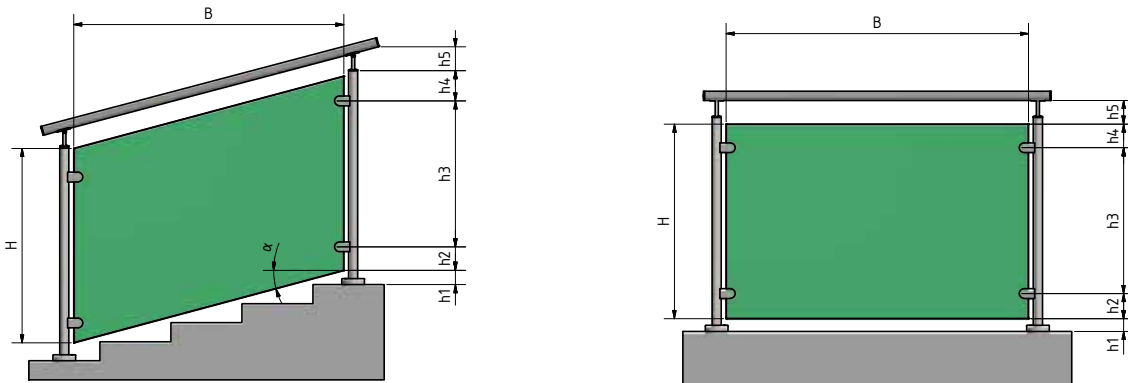

Beteckning	Betydelse	Min. mått [mm]	Max. mått [mm]
H	Glashöjd	800	1100
B	Glasbredd	500	1600
h1	Golv övre kant - glaskant nertill	10	120
h2	Nedre glaskant - klämfäste mittaxel nertill	100	250
h3	Avstånd mellan klämfästen	500	700
h4	Övre glaskant - klämfäste mittaxel upptill	100	250
h5	Avstånd till övre glaskant - ledstång	10-30	250
α	Vinkel mot horisontell linje	0°	41°

Possible dimensions / wind loads as per type statics for exterior applications without posts

		Without lock pin						With lock pin						
		Laminated safety glass made of float glass		Laminated safety glass made of thermally toughened glass		Laminated safety glass made of tempered glass / tempered glass (heat soak test)		Laminated safety glass made of thermally toughened glass			Laminated safety glass made of tempered glass / tempered glass (heat soak test)			
		2 x 6 mm	2 x 4 mm	2 x 5 mm	2 x 6 mm	2 x 4 mm	2 x 5 mm	2 x 6 mm	2 x 4 mm	2 x 5 mm	2 x 6 mm	2 x 4 mm	2 x 5 mm	2 x 6 mm
Width: 500 mm	0.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	1.00 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	1.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	2.00 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	2.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
Width: 750 mm	0.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	1.00 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	1.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	2.00 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	2.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
Width: 1000 mm	0.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	1.00 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	1.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	2.00 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	2.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
Width: 1300 mm	0.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	1.00 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	1.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	2.00 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	2.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
Width: 1600 mm	0.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	1.00 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	1.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	2.00 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies
	2.50 kN/m ²	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies	complies

complies with DIN 18008 does not comply with DIN 18008



ONLEVEL

ONLEVEL Nordic Aps | Gunnar Clausens Vej 26B | 8260 Viby J | Danmark
+45 69 14 38 00 | sales@onlevelnordic.com | www.onlevel.com